



深圳市镭泰光电科技有限公司
Shenzhen LEDTEK Optoelectronics Technology CO.,Ltd



www.ledtek.com.cn sales@ledtek.com.cn



COMPANY PROFILE

Established in 2006, LEDTEK is a high-tech company which is mainly engaged in scientific research, production, technical support and service of LED lighting. LEDTEK product include home LED lighting, commercial LED lighting, LED lamps applied in industry fields

We have a strong R&D staff who are professional in the areas of LED application, electronics, illumination, structure, LED special power supply, technical design and so on. LEDTEK can put your ideas to work.

Insist on the spirit "working hard makes better", LEDTEK offers high quality LED product and professional technology support. Our product have a high reputation and hot market in Europe, North America, Australia, Africa and so on. LEDTEK's products already sell to many countries and districts via distributor and agency.



公司简介

深圳市镭泰光电科技有限公司是深圳市高新技术企业，公司拥有从国外进口的先进的现代化生产设备。是集LED光电终端产品开始、生产、销售、工程和服务于一体的综合性高科技企业，以创新的产品和专业的技术服务拓展国内外市场。公司自主研发LED视频同步控制系统和LED灯饰产品的技术含量居同行业领先水平。公司还在香港设有办事机构在南非建立了合作紧密的代理公司。

深圳市镭泰光电科技有限公司拥有高效精干的管理队伍，公司90%员工具有本科学历，技术骨干中既有国内行业精英也有海外留学博士，另有多名国外灯饰专家为公司特聘顾问。依托优秀的人才优势建立了完善的研发、生产、销售和服务体系。

公司自创立以来，秉承“团结、勤奋、高效”的管理理念和“没有最好，只有更好！”的服务意识，以完善经济和整体解决方案，为客户提供全新的体验。

镭泰人的目标：造一流产品、创一流服务、建一流企业！
我们坚信：凭借雄厚的技术实力和过硬的产品质量，我们有信心成为世界LED光电行业的一流企业！



LED T8 TUBE(系列)



Product Description:

LEDTEK tube series LED tube is special designed to meet new requirement of TUV standard. It adopts SMD 3528 LED as light sources, the constant LED driver can work from AC80-277V, the LED tube can be used all over the world.

The AC input goes through the LED tube from one end, and the LEDTEK LED starter is special designed to replace the traditional starter, so that the customer should not change the wires, and just exchange the traditional tube to the LED tube and replace the traditional starter to the new LED starter. The LED tube can be widely used in supermarket, office, park, factory and so on.

Application:

Replacement for conventional fluorescent tubes

Product Features:

- 1) For indoor use only.
- 2) Directly replacement for any traditional fluorescent T8 tubes
- 3) High power factor
- 4) High efficiency of driver
- 5) High luminous efficacy LED.
- 6) No UV or IR radiatioin
- 7) Compliance with safety standard regulations: EN60968:1990+A1+A2, EN/IEC 62471.
- 8) Energy saving and environment

产品特点:

此日光灯为镭泰光电日光灯系列产品,符合TUV标准。使用SMD 3528作为光源,采用恒流驱动,适用电压范围AC80-277V,可广泛适用于世界各地。

采用交流电单端输入,使用安全。采用LED启动器代替传统的启动器,安装时不需要改变线路,只需把传统的日光灯换成LED日光灯,并把传统的启动器换成LED启动器即可。

产品应用:

可广泛应用于橱窗、餐厅、地柜、书桌照明、灯箱背光、商场、酒楼、超市、办公室、展览厅、居室等场所。使其成为目前取代传统的日光灯的主要发展趋势产品。

产品特性:

1. 光源: SMD 3528
2. 规格: 30/60/90/120/150cm/180cm/240cm X \varnothing 2.6cm
3. 输入电压: AC80-277V
4. 功率因素: PF>0.9
5. 发光角度: 120°
6. 能效: 80%
7. 安规: EN 60968:1990+A1+A2, EN/IEC 62471.
8. 无紫外线、红外线
9. 节能环保。



型号/PART NO	颜色 Emitting colour	色温/TC (K)	功率/Watt (W)	光通量/Luminous flux (lm)	输入电压/Voltage
LT-T-9W (H/N/DW/60CM)	Day Light	6000-6500	9	906/628	AC80-277V
LT-T-9W (H/N/NW/60CM)	Natural White	5000-5500	9	916/638	
LT-T-9W (H/N/CW/60CM)	Cool White	4000-4500	9	926/648	
LT-T-9W (H/N/WW/60CM)	Warm White	3000-3500	9	936/658	
LT-T-14W (H/N/DW/90CM)	Day Light	6000-6500	14	1374/942	
LT-T-14W (H/N/NW/90CM)	Natural White	5000-5500	14	1384/952	
LT-T-14W (H/N/CW/90CM)	Cool White	4000-4500	14	1394/962	
LT-T-14W (H/N/WW/90CM)	Warm White	3000-3500	14	1404/972	
LT-T-18W (H/N/DW/120CM)	Day Light	6000-6500	18	1849/1276	
LT-T-18W (H/N/NW/120CM)	Natural White	5000-5500	18	1859/1286	
LT-T-18W (H/N/CW/120CM)	Cool White	4000-4500	18	1869/1296	
LT-T-18W (H/N/WW/120CM)	Warm White	3000-3500	18	1879/1306	
LT-T-22W (H/N/DW/150CM)	Day Light	6000-6500	22	2310/1580	
LT-T-22W (H/N/NW/150CM)	Natural White	5000-5500	22	2320/1590	
LT-T-22W (H/N/CW/120CM)	Cool White	4000-4500	22	2330/1600	
LT-T-22W (H/N/WW/120CM)	Warm White	3000-3500	22	2340/1610	

BT(H/N)=B:series T:transparent cover(P:prismatic cover/F:frost cover) H:high lumen N:normal lumen





型号/PART NO	颜色/Emitting colour	色温/TC (K)	功率/Watt (W)	光通量/Luminous flux (lm)	输入电压/Voltage
LT-T8-BT(H/N)-9W-DW-A0(60CM)	Day Light	6000-6500	9	906/628	AC90-130V AC180-240V
LT-T8-BT(H/N)-9W-NW-A0(60CM)	Natural White	5000-5500	9	916/638	
LT-T8-BT(H/N)-9W-CW-A0(60CM)	Cool White	4000-4500	9	926/648	
LT-T8-BT(H/N)-9W-WW-A0(60CM)	Warm White	3000-3500	9	936/658	
LT-T8-BT(H/N)-14W-DW-A0(90CM)	Day Light	6000-6500	14	1374/942	
LT-T8-BT(H/N)-14W-NW-A0(90CM)	Natural White	5000-5500	14	1384/952	
LT-T8-BT(H/N)-14W-CW-A0(90CM)	Cool White	4000-4500	14	1394/962	
LT-T8-BT(H/N)-14W-WW-A0(90CM)	Warm White	3000-3500	14	1404/972	
LT-T8-BT(H/N)-18W-DW-A0(120CM)	Day Light	6000-6500	18	1849/1276	
LT-T8-BT(H/N)-18W-NW-A0(120CM)	Natural White	5000-5500	18	1859/1286	
LT-T8-BT(H/N)-18W-CW-A0(120CM)	Cool White	4000-4500	18	1869/1296	
LT-T8-BT(H/N)-18W-WW-A0(120CM)	Warm White	3000-3500	18	1879/1306	
LT-T8-BT(H/N)-22W-DW-A0(150CM)	Day Light	6000-6500	22	2310/1580	
LT-T8-BT(H/N)-22W-NW-A0(150CM)	Natural White	5000-5500	22	2320/1590	
LT-T8-BT(H/N)-22W-CW-A0(150CM)	Cool White	4000-4500	22	2330/1600	
LT-T8-BT(H/N)-22W-WW-A0(150CM)	Warm White	3000-3500	22	2340/1610	

BT(H/N)=B:series T:transparent cover(P:prismatic cover/F:frost cover) H:high lumen N:normal lumen



型号/PART NO	颜色/Emitting colour	色温/TC (K)	功率/Watt (W)	光通量/Luminous flux (lm)	输入电压/Voltage
LT-T8-BT(H/N)-9W-DW-A2(60CM)	Day Light	6000-6500	9	906/628	AC90-130V AC180-240V
LT-T8-BT(H/N)-9W-NW-A2(60CM)	Natural White	5000-5500	9	916/638	
LT-T8-BT(H/N)-9W-CW-A2(60CM)	Cool White	4000-4500	9	926/648	
LT-T8-BT(H/N)-9W-WW-A2(60CM)	Warm White	3000-3500	9	936/658	
LT-T8-BT(H/N)-14W-DW-A2(90CM)	Day Light	6000-6500	14	1374/942	
LT-T8-BT(H/N)-14W-NW-A2(90CM)	Natural White	5000-5500	14	1384/952	
LT-T8-BT(H/N)-14W-CW-A2(90CM)	Cool White	4000-4500	14	1394/962	
LT-T8-BT(H/N)-14W-WW-A2(90CM)	Warm White	3000-3500	14	1404/972	
LT-T8-BT(H/N)-18W-DW-A2(120CM)	Day Light	6000-6500	18	1849/1276	
LT-T8-BT(H/N)-18W-NW-A2(120CM)	Natural White	5000-5500	18	1859/1286	
LT-T8-BT(H/N)-18W-CW-A2(120CM)	Cool White	4000-4500	18	1869/1296	
LT-T8-BT(H/N)-18W-WW-A2(120CM)	Warm White	3000-3500	18	1879/1306	
LT-T8-BT(H/N)-22W-DW-A2(150CM)	Day Light	6000-6500	22	2310/1580	
LT-T8-BT(H/N)-22W-NW-A2(150CM)	Natural White	5000-5500	22	2320/1590	
LT-T8-BT(H/N)-22W-CW-A2(150CM)	Cool White	4000-4500	22	2330/1600	
LT-T8-BT(H/N)-22W-WW-A2(150CM)	Warm White	3000-3500	22	2340/1610	

BT(H/N)=B:series T:transparent cover(P:prismatic cover/F:frost cover) H:high lumen N:normal lumen



Product Description:

1. Use 3528 SMD LED as light source; The light attenuation of the SMD LED is better than DIP LED
2. Use aluminum circuit board; (MCPCB) The heat dissipation ability of the MCPCB is better than FR4;
3. Using aluminum alloy shell, with transparent cover; Has good heat dissipation ability and the excellent light output
4. Embedded constant current drive power supply;
5. The standard length, compatible with the traditional fluorescent lamp
6. AC90-130V AC180-240V
7. CE and RoHS certification
8. We supply high brightness and normal brightness version, it can meet the demand of various customer

产品特点:

LED 日光灯系列产品灯体采用优质铝合金外壳，面罩PC罩，具有散热好，重量轻，透光率高的特点；光源采用3528SMD LED，不含汞、铅等对环境污染很大的重金属，具有亮度高、寿命长、电性稳定、绿色环保等特点；电源采用高效恒流驱动电路，电性稳定可靠，其效率大于85%的特点。已过CE RoHS FCC认证。

产品应用:

可广泛应用于橱窗、餐厅、地柜、书桌照明、灯箱背光、商场、酒楼、超市、办公室、展览厅、居室等场所。使其成为目前取代传统的日光灯的主要发展趋势产品。

Application:

Replacement for conventional fluorescent tubes

BT(H/N)=B:series T:transparent cover(P:prismatic cover/F:frost cover) H:high lumen N:normal lumen

型号/PART NO	颜色/Emitting colour	色温/TC (K)	功率/Watt (W)	光通量/Luminous flux (lm)	输入电压/Voltage
LT-T8-AT(H/N)-9W-DW(60CM)	Day Light	6000-6500	9	660/956	AC90-130V AC180-240V
LT-T8-AT(H/N)-9W-NW(60CM)	Natural White	5000-5500	9	650/946	
LT-T8-AT(H/N)-9W-CW(60CM)	Cool White	4000-4500	9	640/936	
LT-T8-AT(H/N)-9W-WW(60CM)	Warm White	3000-3500	9	630/916	
LT-T8-AT(H/N)-18W-DW(120CM)	Day Light	6000-6500	18	1300/1880	
LT-T8-AT(H/N)-18W-NW(120CM)	Natural White	5000-5500	18	1290/1870	
LT-T8-AT(H/N)-18W-CW(120CM)	Cool White	4000-4500	18	1280/1860	
LT-T8-AT(H/N)-18W-WW(120CM)	Warm White	3000-3500	18	1270/1850	
LT-T8-AT(H/N)-22W-DW(150CM)	Day Light	6000-6500	22	1630/2350	
LT-T8-AT(H/N)-22W-NW(150CM)	Natural White	5000-5500	22	1620/2340	
LT-T8-AT(H/N)-22W-CW(150CM)	Cool White	4000-4500	22	1610/2330	
LT-T8-AT(H/N)-22W-WW(150CM)	Warm White	3000-3500	22	1600/2320	

LED T10 TUBE(系列)



Product Description:

1. Use 3528 SMD LED as light source; The light attenuation of the SMD LED is better than DIP LED
2. Use aluminum circuit board; (MCPCB) The heat dissipation ability of the MCPCB is better than FR4;
3. Using aluminum alloy shell, with transparent cover; Has good heat dissipation ability
4. Embedded constant current driver power supply;
5. The standard length, compatible with the traditional fluorescent lamp
6. AC110V/AC220V
7. CE and ROHS certification
8. We supply high brightness and normal brightness version, It can meet the demand of various customers

产品特点:

LED日光灯系列产品灯体采用优质铝合金外壳，面罩采用PC甲虫，具有散热好，重量轻，透光率高的特点；光源采用3528SMD LED，不含汞、铅等对环境污染很大的重金属，具有亮度高、寿命长、电性稳定、绿色环保等特点；电源采用高效恒流驱动电路，电性稳定可靠，其效率大于85%的特点。已过CE、RoHS、FCC认证。
此款可提供高亮和中亮两款，满足不同客户需求。

产品应用:

可广泛用于橱窗、餐厅、地柜、书桌照明、灯箱背光、商场、酒楼、超市、办公室、展览厅、居室等场所。使其成为目前取代传统的日光灯的主要发展趋势产品。

Application:

Replacement for conventional fluorescent tubes

型号/PART NO	颜色/Emitting colour	色温/TC (K)	功率/Watt (W)	光通量/Luminous flux (lm)	输入电压/Voltage
LT-T10-AP(H/N)-9W-DW(60CM)	Day Light	6000-6500	9	653/940	AC90-130V AC180-240V
LT-T10-AP(H/N)-9W-NW(60CM)	Natural White	5000-5500	9	643/930	
LT-T10-AP(H/N)-9W-CW(60CM)	Cool White	4000-4500	9	633/920	
LT-T10-AP(H/N)-9W-WW(60CM)	Warm White	3000-3500	9	623/910	
LT-T10-AP(H/N)-18W-DW(120CM)	Day Light	6000-6500	18	1301/1877	
LT-T10-AP(H/N)-18W-NW(120CM)	Natural White	5000-5500	18	1291/1867	
LT-T10-AP(H/N)-18W-CW(120CM)	Cool White	4000-4500	18	1281/1857	
LT-T10-AP(H/N)-18W-WW(120CM)	Warm White	3000-3500	18	1271/1847	
LT-T10-AP(H/N)-22W-DW(150CM)	Day Light	6000-6500	22	1625/2345	
LT-T10-AP(H/N)-22W-NW(150CM)	Natural White	5000-5500	22	1615/2335	
LT-T10-AP(H/N)-22W-CW(150CM)	Cool White	4000-4500	22	1605/2325	
LT-T10-AP(H/N)-22W-WW(150CM)	Warm White	3000-3500	22	1595/2315	

BT(H/N)=B:series T:transparent cover(P:prismatic cover/F:frost cover) H:high lumen N:normal lumen



LED T5 TUBE(系列)



Product Features:

LT-T5 series is a kind of PC bracket. Standard length and color temperature available.
Made of SMD 3528 LEDs, aluminium PCB board. The tube is made of aluminium+PC cover. It features long lifespan, energy saving.

Benefits:

- 1) Solid-state, high shock/vibration resistant.
- 2) Major reduction in power costs.
- 3) No RF interference, No buzzing noise.
- 4) No fluorescent flickering.
- 5) No hazard of mercury or lead entering the environment.
- 6) No danger of broken glass.
- 7) No threat of high-voltage electrocution.
- 8) Maintenance free, easy installation.
- 9) Long lifetime 35,000+hrs(5+years).
- 10) Low power consumption, high intensity

产品特点:

提供标准长度和色温的LT-T5P系列塑料支架灯管系列，冷光源，发热低微，绿色环保3528LED光源，外壳由铝型和PC面罩组成，铝基板提高散热，设计新颖，高效节能，超长使用寿命，功率小无频闪，无汞污染，使用安全可靠。


产品应用:

工厂、商厦、学校、楼道、洗手间、库房、酒店、家庭照明，办公楼，展览厅等照明场所。



型号/PART NO	颜色/Emitting colour	色温/TC (K)	功率/Watt (W)	光通量/Luminous flux (lm)	输入电压/Voltage
LT-T5-PT(N/H)-288-DW	Day Light	6000-6500	4	216/312	AC85-264V
LT-T5-PT(N/H)-288-CW	Natural White	5000-5500	4	206/302	
LT-T5-PT(N/H)-288-WW	Cool White	4000-4500	4	196/292	
LT-T5-PT(N/H)-549-DW	Warm White	3000-3500	7	510/730	
LT-T5-PT(N/H)-549-CW	Day Light	6000-6500	7	500/720	
LT-T5-PT(N/H)-549-WW	Natural White	5000-5500	7	490/710	
LT-T5-PT(N/H)-849-DW	Cool White	4000-4500	11	760/1100	
LT-T5-PT(N/H)-849-CW	Warm White	3000-3500	11	741/1080	
LT-T5-PT(N/H)-849-WW	Day Light	6000-6500	11	730/1070	
LT-T5-PT(N/H)-1149-DW	Natural White	5000-5500	14	980/1400	
LT-T5-PT(N/H)-1149-CW	Cool White	4000-4500	14	960/1380	
LT-T5-PT(N/H)-1149-WW	Warm White	3000-3500	14	950/1370	
LT-T5-PT(N/H)-1449-DW	Natural White	5000-5500	16	1080/1560	
LT-T5-PT(N/H)-1449-CW	Cool White	4000-4500	16	1070/1550	
LT-T5-PT(N/H)-1449-WW	Warm White	3000-3500	16	1060/1540	

1. PT/F(NH)=F:Frost cover N:Normal lumen H:High lumen 2. AT/F(NH)=F:Frost cover N:Normal lumen H:High lumen

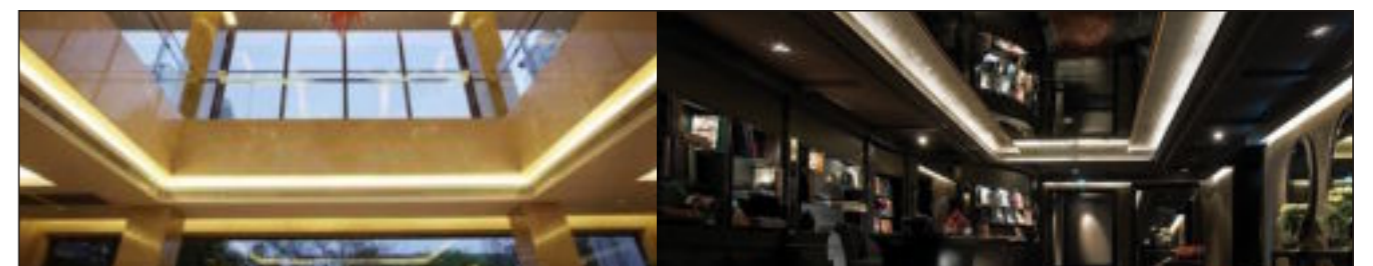

LED PANEL LIGHT LED 平板灯



Energy saving can be 80%. High lumen LED.
Constant current driver ;
Ambient Temperature: -20 – 50° ;
Easy installation and environment friendly;
No hertzian waves
Solid-state, high shock / vibration resistant;
No RF interference;
Long lifetime 50, 000+ hrs ;
Major reduction in power costs;
Low power consumption, high intensity;

节能可达80%,
高亮度 特殊的不同视觉角度, 设计多样化
瞬间启动, 无眩光, 无鸣音
内置高效 (95%) 热保护系统, 恒流驱动
工作环境温度: -20°C ~ 60°C
安装方便、节能环保
无电磁波 无汞、铅等危害环境的有害物质

型号/PART NO	颜色/Emitting colour	色温/TC (K)	功率/Watt (W)	光通量/Luminous flux (lm)	输入电压/Voltage
LT-LPLFS6060-35W-DW	Day Light	6000-6500	35W	2387	AC85-264V
LT-LPLFS6060-35W-NW	Natural White	5000-5500	35W	2377	
LT-LPLFS6060-35W-CW	Cool White	4000-4500	35W	2367	
LT-LPLFS6060-35W-WW	Warm White	3000-3500	35W	2357	
LT-LPLPS6060-35W-DW	Day Light	6000-6500	35W	2400	
LT-LPLPS6060-35W-NW	Natural White	5000-5500	35W	2390	
LT-LPLPS6060-35W-CW	Cool White	4000-4500	35W	2380	
LT-LPLPS6060-35W-WW	Warm White	3000-3500	35W	2370	
LT-LPLFS60120-60W-DW	Day Light	6000-6500	60W	4472	
LT-LPLFS60120-60W-NW	Natural White	5000-5500	60W	4462	
LT-LPLFS60120-60W-CW	Cool White	4000-4500	60W	4452	
LT-LPLFS60120-60W-WW	Warm White	3000-3500	60W	4442	
LT-LPLPS60120-60W-DW	Day Light	6000-6500	60W	4480	
LT-LPLPS60120-60W-NW	Natural White	5000-5500	60W	4470	
LT-LPLPS60120-60W-CW	Cool White	4000-4500	60W	4460	
LT-LPLPS60120-60W-WW	Warm White	3000-3500	60W	4450	



LED BULB SERIES LED 球泡系列



Feature:

With super bright led light source.this led bulb provides cozy and gentle light without flashing or uv radiation it's small-sized,easy to install.
With milk white glass cover,good light appearance.

Application:

This series of lamps are widely used in shop,hotel,family decoration and replace of traditional bulb.

Remark:

1.it is non-waterproof.
2.rating voltage:AC85V-264V / AC0-110V / AC0-230V Are available

产品特点:

一体化散热设计, 造型美观, 外形简洁; 以高亮LED作为光源, 采用高透光率的磨砂玻璃球泡, 消除不良眩光; 无频闪, 直流驱动电流, 光效温和舒适, 寿命长、无铅、无汞、绿色环保. 已过CE、RoHS认证.

产品应用:

适用于家庭、楼道、办公室、庭院灯、酒店、大厦、广场、游乐场、走道、会议厅等场所照明.

产品特性:

- 1.不可调光
- 2.灯口: E27/E26/B22
- 3.工作电压: 85-264VAC/AC0-110V/AC0-230V
- 4.发光角度: 180度
- 5.使用寿命: 50000Hrs
- 6.无紫外线、红外线
- 7.节能环保.

型号/PART NO	颜色/Emitting colour	功率/Watt (W)	光通量/Luminous flux (lm)	灯座/Base	输入电压/Voltage
LT-HPB-2W	Warm White/Day Light	2W	90	E27/E26/B22	AC85V-264V
LT-HPB-4W	Warm White/Day Ligh	4W	270		
LT-HPB-5W	Warm White/Day Light	5W	360		
LT-HPB-7W	Warm White/Day Light	7W	450		
LT-HPB-9W	Warm White/Day Ligh	9W	630		
LT-HPB-11W	Warm White/Day Light	11W	810		
LT-HPBD-5W	Warm White/Day Light	5W	320/360		
LT-HPBD-7W	Warm White/Day Light	7W	400/450		



SMD3258/5050 LED SPOT LIGHT LED 灯杯系列



Product Features:

Long life and high brightness Low power consumption and easy to handle, Environment friendly, Safety and easy to install.

1. Base type: GU10 base
2. Energy-saving and environment-friendly
3. Full range of colors: cool white, warm white, red, blue, green and yellow
4. Superior thermal management with internal aluminium PCB Board and external aluminum housing
5. Light source: SMD3258/SMD5050 LED
6. Temperature: -20 ~ 50 degrees Celsius
7. Brightness degradation: 3% - 5% 1kh
8. Lifespan: 35,000 hours
9. No UV or IR radiation

Application:

Widely used for decoration field such as super market, Hotel, tavern, meeting-room, exhibition hall, show window, Disco, karaoke singing-hall, house decoration and etc. Replacement bulbs for general lighting, especially for museums Art galleries, cosmetic counter and etc.

产品特点:

采用高亮度的LED作为发光光源, 色彩鲜丽, 色泽纯正, 投向角度范围大, 无光斑, 光衰小, 寿命长, 铝外壳, 使用方面, 安全, 体积小, 易安装。

产品应用:

适用于会议室、展览厅、商场、酒楼、博物馆、艺术画廊、展品展柜等照明场所。

产品特性:

1. 灯座: MR16/GU10
2. 颜色: 正白、冷白、暖白、红、绿、蓝、黄
3. 无紫外线, 无红外线。

型号/PART NO	颜色/Emitting colour	LED 类型/LED type	LED Qty/LED 颗粒	功率/Watt (W)	输入电压/Voltage	灯座/Base
LT-MR16-2W30S3528	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	SMD3528	30pcs	3W	DC12V	MR16
LT-MR16-3W48S3528	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	SMD3528	48pcs	4W	DC12V	MR16
LT-GU10-2W30S3528	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	SMD3528	30pcs	3W	AC85-264V	GU10
LT-GU10-3W48S3528	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	SMD3528	48pcs	4W	AC85-264V	GU10
LT-MR16-2W12S5050	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	SMD5050	12pcs	3W	DC12V	MR16
LT-MR16-3W18S5050	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	SMD5050	18pcs	4W	DC12V	MR16
LT-MR16-5W24S5050	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	SMD5050	24pcs	5W	DC12V	MR16
LT-GU10-2W12S5050	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	SMD5050	12pcs	3W	AC85-264V	GU10
LT-GU10-3W18S5050	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	SMD5050	18pcs	4W	DC12V	GU10



LED SPOT LIGHT SERIES LED 灯杯系列



Product Features:

1. Base type: MR16 base
2. Energy-saving and environment-friendly
3. Full range of colors: cool white, warm white, red, blue, green and yellow
4. Superior thermal management with internal copper heat conductor and external aluminum housing
5. Low depreciation
6. Brightness degradation: 3%-5% 1kh
7. Long Lifespan
8. No UV or IR radiation

Application:

Replacement bulbs for general lighting, especially for museums, art galleries, cosmetic counters where UV or IR radiation is undesirable.

Remark:

1. Make sure the power supply is adapted to the right voltage before use;
2. Please insure that the switch is off before connect the power supply;
3. Please don't touch the metal body and watch the light source directly while lighting;
4. Indoor use only;

产品特点:

采用高亮度的LED作为发光光源, 色彩鲜丽, 色泽纯正, 投向角度范围大, 无光斑, 光衰小, 寿命长, 铝外壳, 使用方面, 安全, 体积小, 易安装。

产品应用:

适用于会议室、展览厅、商场、酒楼、博物馆、艺术画廊、展品展柜等照明场所。

产品特性:

1. 灯座: MR16/GU10/E27
2. 颜色: 正白、冷白、暖白、红、绿、蓝、黄
3. 无紫外线, 无红外线。

型号/PART NO	颜色/Emitting colour	LED Qty/LED 颗粒	功率/Watt (W)	输入电压/Voltage	灯座/Base
LT-MR16-3X1W	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	3pcs	3W	AC12V/DC12V	MR16
LT-MR16-4X1W	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	4pcs	4W	AC12V/DC12V	MR16
LT-GU10-3X1W	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	3pcs	3W	AC85-264V	GU10
LT-GU10-4X1W	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	4pcs	4W	AC85-264V	GU10
LT-E27-3X1W	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	3pcs	3W	AC85-264V	E27
LT-HPPar-3X1W	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	3pcs	3W	AC85-264V	E27
LT-HPPar-5X1W	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	5pcs	5W	AC85-264V	E27
LT-HPPar-7X1W	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	7pcs	7W	AC85-264V	E27
LT-HPPar-9X1W	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	9pcs	9W	AC85-264V	E27
LT-HPPar-12X1W	Day Light/Cool White/Warm White Red/Green/Blue/Yellow	12pcs	12W	AC85-264V	E27



RGB CONTROLLER LED多功能控制器



Product Brief

LT-RGBCTRL-01 multi function LED controller is a universal RGB controller with high-performance, adopted the most advanced PWM control technology. It's dedicated to control entire RGB color changes of LED lights with 4 wires (common anode), such as RGB LED module, LED strip, LED tape, LED wall washer, floodlight, LED under water lamp and other LED lights.

Technical Specs

Input Voltage: DC5V-DC24V
Output current: 6A/CH*3 BRT
Total output power: 210W(12V) 420W(24)
Color Depth: Max. 256 levels per RGB Remote
Speed: 8 levels
Adjust: 8 levels
Changing Mode: 17 modes
Distance: 50m



Features

- 1) Controlled both by manual buttons and it's fitting remote controller, reliable control distance can reach as far as 50m.
- 2) Automatic switch from DC5-DC24V.
- 3) Can turn on or off controller by ON/OFF button.
- 4) 3-Channel RGB full color control, maximum outputs 6A per Channel.
- 5) 17 modes of color skipping, color gradual changes with color depth maximum 256 levels per RGB.
- 6) Speed and brightness of each mode is adjustable separately from 1-8 levels.
- 7) Used as a standalone controller or to work together with LT-LEDXT01 realizing infinite power expansion to connect any quantity of LED lights.

产品特点:


LT-RGBCTRL-01多功能LED控制器是一款通用型高性能的整体变色功率控制器;可控制所有四线三回路(共阳极)LED全彩灯饰产品,广泛应用于控制RGB全彩的LED模组,LED灯条,LED灯带,大功率LED投光灯,洗墙灯以及水底灯等LED灯具产品。

性能参数

电源输入: DC5V-DC24V
输出负载电流: 6A/路*3路
输出总功率: 210W (12V) 420W(24V)
灰度级: 最高RGB各256级
速度选择: 8级
整体亮度调节: 8级
变化模式选择: 17种
遥控距离: 50米

产品特性:

- 1) 有按键控制和无线遥控两种控制方式,可靠遥控距离可达50米;
- 2) 三通道RGB全彩控制,每路最大输出电流可达6A
- 3) 7种静态模式,10种跳、渐变变化模式;
- 4) 可单独选择每种跳、渐变变化模式1-8级变化速度;
- 5) 可单独选择每种变化模式1-8级整体亮度;
- 6) 变化时使用暂停功能,可保持当前LED灯具灰度和颜色;
- 7) 可单机使用,也可配合功率扩展器联机使用,联机数量理论是无限的;
- 8) 可实现无限的输出功率放大。

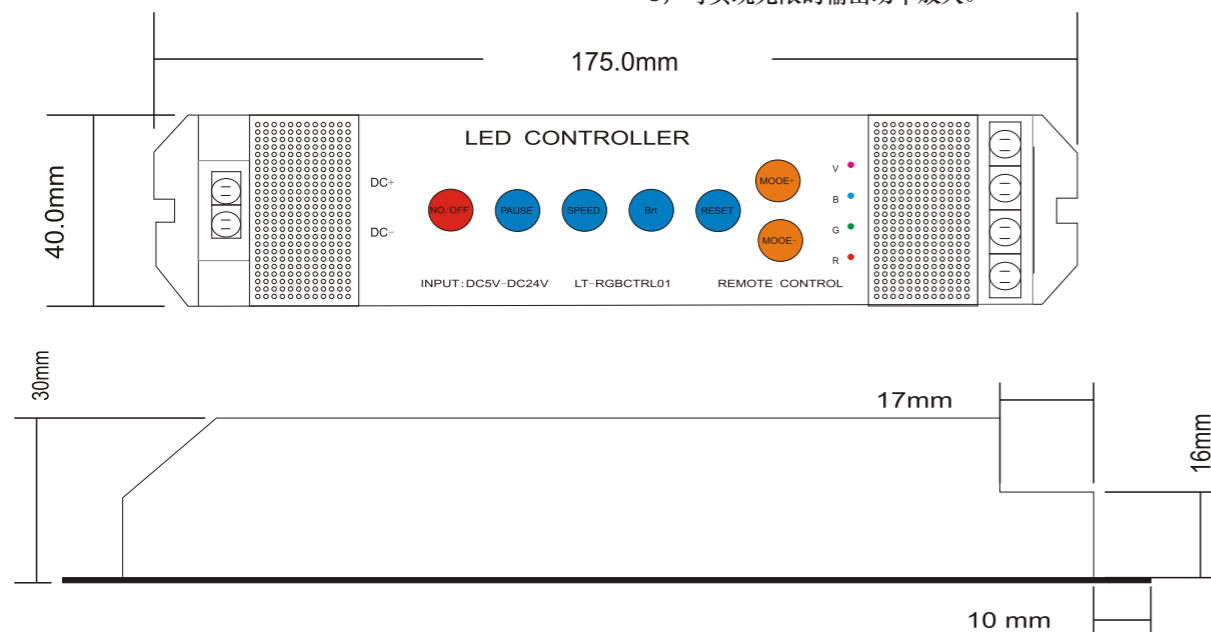

Wireless RGB LED Product Control System LED 功率扩展器



Product Brief

LED amplifier is suitable for all of our company's power-output style contrlers' power expansion, it accepts PWM control, the control quantity will be twice as much by adding on more power repeater, unlimited quantity of power repeater to be connected theoretically.

Specification

part No: LT-LEDXT01
power input DC5V-DC24V
Output Current: 6A/CHx3
Consumption: < 2W
Output Power: 1~90W(5V)
1~220W(12V)
1~450W(24V)



产品特点:



LED功率扩展器适用于我公司所有功率型LED控制器的功率放大,功率扩展器可接受PWM(脉宽调制)控制,每增加一个功率扩展器就可以多连接一倍的LED灯数量,理论上可以连接无限多个功率扩展器。

产品特性:

型号: LT-LEDXT01
输入电压: DC5V-DC24V
输出负载电流: 6A/路x3路
自身功耗: < 1W
输出总功率: 1~90W(5V) 1~220W(12V) 1~450(24V)
保护功能: 过载自动保护
工作温度: -35° C-55° C
外形尺寸: L121xW39xH39(mm)
包装尺寸: L123xW42xH42(mm)
重量(毛重): 100g

Features

- 3 Channels RGB output, 6A/CH, total 18A.
- Accept PWM control.
- Unlimited connection quantity theoretically, unlimited power output expansion.
- Unlimited distance between controller to repeater, repeater to repeater theoretically.
- Working Temp: 35°C-55°C
- Dimension: L121xW39xH39(mm)
- Package size: L123xW42xH42(mm)
- Weight(G.W.)100g

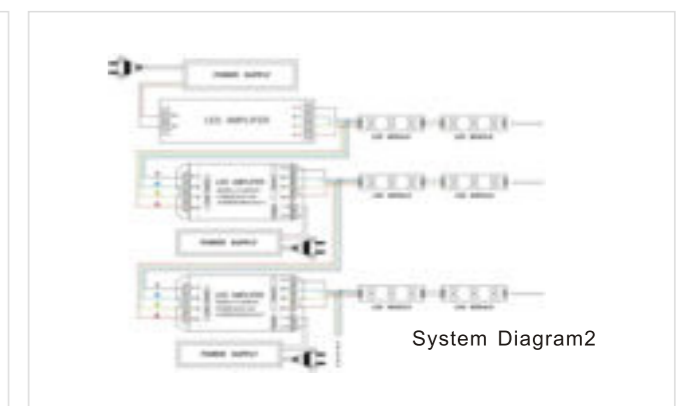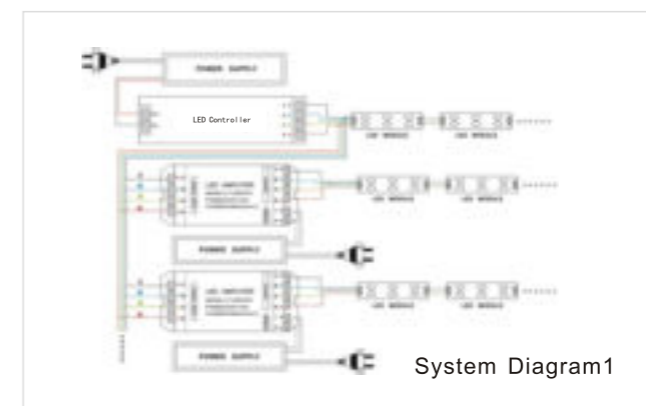

LED STRIP LIGHT LED 铝灯条 LIGHT WITH COVER(带面罩系列)



Benefits

- 1)Solid-state,high shock/vibration resistant
- 2)Major reduction in power costs
- 3)No RF interference, No buzzing noise
- 4)No flickering
- 5)No threat of high-voltage electrocution
- 6)Maintenance free,easy installation
- 7)Long lifetime
- 8)Low power consumption,high intensity

Application

- 1.Under-cabinet lighting
- 2.Refrigerated display lighting
- 3.Bar and freezer cabinet lighting

产品特点

本品由铝槽, SMD 5050 LED/SMD 3528 LED, 亮度高, 宽角度, 光斑均匀, 铝合金壳体导热, 高透光率胶水灌封, 低压驱动, 使用安全, 灌胶组成。

产品应用

广泛用于珠宝展示柜、手机展示柜、厨柜以及汽车装饰、室内装饰、舞台装饰、楼宇亮化装饰。



图片 PICTURES	型号 PART NO	颜色 Emitting colour	LED 颗粒 LED Qty.	功率(W) Watt(W)	长度(m) Length(m)	输入电压 Voltage
	LT-ALSCT3528XX30-12	WW/CW/DW R/G/B/Y	30pcs	2.4W ± 10%	31.6cm	DC12V
	LT-ALSCT3528XX60-12		60pcs	4.8W ± 10%	61.6cm	DC12V
	LT-ALSCT3528XX90-12		90pcs	7.2W ± 10%	91.6cm	DC12V
	LT-ALSCT3528XX120-12		120pcs	9.6W ± 10%	121.6cm	DC12V
	LT-ALSCF3528XX30-12	WW/CW/DW R/G/B/Y	30pcs	2.4W ± 10%	31.6cm	DC12V
	LT-ALSCF3528XX60-12		60pcs	4.8W ± 10%	61.6cm	DC12V
	LT-ALSCF3528XX90-12		90pcs	7.2W ± 10%	91.6cm	DC12V
	LT-ALSCF3528XX120-12		120pcs	9.6W ± 10%	121.6cm	DC12V
	LT-ALSCL3528XX30-12	WW/CW/DW R/G/B/Y	30pcs	2.4W ± 10%	31.6cm	DC12V
	LT-ALSCL3528XX60-12		60pcs	4.8W ± 10%	61.6cm	DC12V
	LT-ALSCL3528XX90-12		90pcs	7.2W ± 10%	91.6cm	DC12V
	LT-ALSCL3528XX120-12		120pcs	9.6W ± 10%	121.6cm	DC12V



图片 PICTURES	型号 PART NO	颜色 Emitting colour	LED 颗粒 LED Qty.	功率(W) Watt(W)	长度(m) Length(m)	输入电压 Voltage
	LT-ALSCF5050AXX15-12	WW/CW/DW R/G/B/Y RGB	15pcs	3.6W ± 10%	51.6cm	DC12V
	LT-ALSCF5050AXX30-12		30pcs	7.2W ± 10%	101.6cm	DC12V
	LT-ALSCF5050AXX45-12		45pcs	10.8W ± 10%	151.6cm	DC12V

图片 PICTURES	型号 PART NO	颜色 Emitting colour	LED 颗粒 LED Qty.	功率(W) Watt(W)	长度(m) Length(m)	输入电压 Voltage
	LT-ALSCT5050AXX15-12	WW/CW/DW R/G/B/Y RGB	15pcs	3.6W ± 10%	51.6cm	DC12V
	LT-ALSCT5050AXX30-12		30pcs	7.2W ± 10%	101.6cm	DC12V
	LT-ALSCT5050AXX45-12		45pcs	10.8W ± 10%	151.6cm	DC12V

图片 PICTURES	型号 PART NO	颜色 Emitting colour	LED 颗粒 LED Qty.	功率(W) Watt(W)	长度(m) Length(m)	输入电压 Voltage
	LT-ALSCL5050AXX15-12	WW/CW/DW R/G/B/Y RGB	15pcs	3.6W ± 10%	51.6cm	DC12V
	LT-ALSCL5050AXX30-12		30pcs	7.2W ± 10%	101.6cm	DC12V
	LT-ALSCL5050AXX45-12		45pcs	10.8W ± 10%	151.6cm	DC12V

图片 PICTURES	型号 PART NO	颜色 Emitting colour	LED 颗粒 LED Qty.	功率(W) Watt(W)	长度(m) Length(m)	输入电压 Voltage
	LT-ALSCF5050BXX30-12	WW/CW/DW R/G/B/Y RGB	30pcs	7.2W ± 10%	51.6cm	DC12V
	LT-ALSCF5050BXX60-12		60pcs	14.4W ± 10%	101.6cm	DC12V
	LT-ALSCF5050BXX90-12		90pcs	21.6W ± 10%	151.6cm	DC12V

图片 PICTURES	型号 PART NO	颜色 Emitting colour	LED 颗粒 LED Qty.	功率(W) Watt(W)	长度(m) Length(m)	输入电压 Voltage
	LT-ALSCT5050BXX30-12	WW/CW/DW R/G/B/Y RGB	30pcs	7.2W ± 10%	51.6cm	DC12V
	LT-ALSCT5050BXX60-12		60pcs	14.4W ± 10%	101.6cm	DC12V
	LT-ALSCT5050BXX90-12		90pcs	21.6W ± 10%	151.6cm	DC12V

图片 PICTURES	型号 PART NO	颜色 Emitting colour	LED 颗粒 LED Qty.	功率(W) Watt(W)	长度(m) Length(m)	输入电压 Voltage
	LT-ALSCL5050BXX30-12	WW/CW/DW R/G/B/Y RGB	30pcs	7.2W ± 10%	51.6cm	DC12V
	LT-ALSCL5050BXX60-12		60pcs	14.4W ± 10%	101.6cm	DC12V
	LT-ALSCL5050BXX90-12		90pcs	21.6W ± 10%	151.6cm	DC12V

LED STRIP LIGHT

LED 铝灯条



Product Features:

- 1.Low power consumption;low heat
- 2.Compact size to suit narrow space installation.
- 3.Well-protected package for shipment
- 4.Waterproof grade:IP65

Application:

- 1)Cove lighting
- 2)can be installed in refrigerator for lighting
- 3)Architectural lights for canopy,corridor.window,archway
- 4)Backlight or edge lighting for signage
- 5)DIY lights for home use
- 6)Decorative lights for holiday,event,show,exhibition
- 7)Decorative lights for automobile
- 8)Ideal replacement of incandescent and fluorescent light
- 9)Under-cabinet lighting
- 10)Refrigerated display lighting
- 11)Bar and freezer cabinet lighting

产品特点


本品由铝槽, SMD 3528 LED/SMD 5050 LED, 亮度高, 宽角度, 光斑均匀, 铝合金壳体导热, 高透光率胶水灌封, 低压驱动, 使用安全, 灌胶组成。

产品应用

广泛用于珠宝展示柜、手机展示柜、厨柜以及汽车装饰、室内装饰、舞台装饰、楼宇亮化装饰。



型号 PART NO	颜色 Emitting colour	LED 颗粒 LED Qty.	功率(W) Watt(W)	长度 (m) Length(m)	输入电压 Voltage
LT-ALS5050AXX15-12	WW/CW/DW	15pcs	3.6W ± 10%	50cm	DC12V
LT-ALS5050AXX30-12	R/G/B/Y	30pcs	7.2W ± 10%	100cm	DC12V
LT-ALS5050AXX45-12	RGB	45pcs	10.8W ± 10%	150cm	DC12V
LT-ALS5050BXX30-12	WW/CW/DW	30pcs	7.2W ± 10%	50cm	DC12V
LT-ALS5050BXX60-12	R/G/B/Y	60pcs	14.4W ± 10%	100cm	DC12V
LT-ALS5050BXX90-12	RGB	90pcs	21.6W ± 10%	150cm	DC12V
LT-ALS3528XX30-12		30pcs	2.4W ± 10%	30cm	DC12V
LT-ALS3528XX60-12	WW/CW/DW	60pcs	4.8W ± 10%	60cm	DC12V
LT-ALS3528XX90-12	R/G/B/Y	90pcs	7.2W ± 10%	90cm	DC12V
LT-ALS3528XX120-12		120pcs	9.6W ± 10%	120cm	DC12V

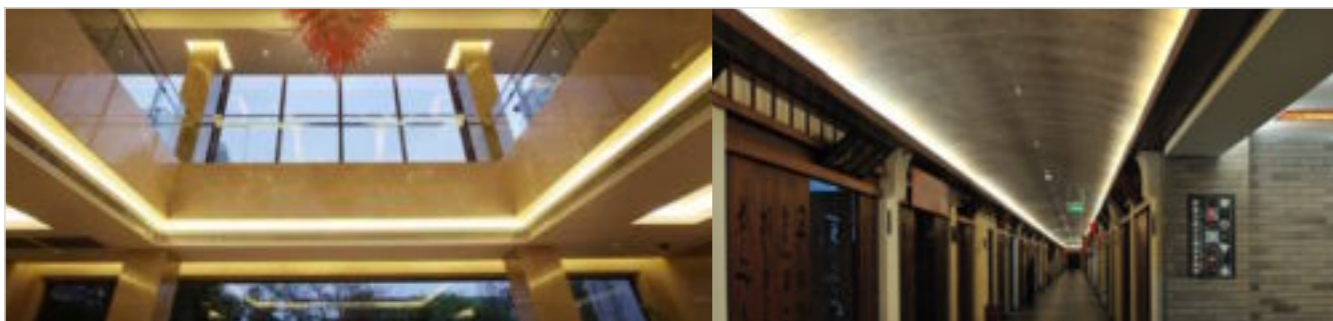

LED STRIP LIGHT(SMD 5050)

LED 灯条系列(SMD 5050)



Product Features:

- 1.Available in full range of colors including single colors and RGB full color with super bright LED
- 2.Continuous length flexible LED light strips
- 3.The light ribbon can be cut apart every 3-LEDs interval for design flexibility.
- 4.The flexible stripe is 8mm wide whereas RGB version is 10mm wide.
- 5.Solid-state,high shock/vibration resistant
- 6.Viewing angle is 120 degrees and voltage is 12VDC
- 7.Maintenance free,easy installation

产品特点:

采用非常柔软的FPC为基板, 可以弯曲而不会折断, 易于成型, 适合各种广告造型需要。应用高亮度贴片LED为发光元件, 功率低, 散热好, 采用的是低压直流12V供电电压, 使用安全, 安装简便, 配用固定夹即可装在多种支面上。

产品应用:

广泛用于楼体轮廓、台阶、展台、桥梁、酒店、KTV装饰照明, 以及广告牌的制作, 各种大型画面、字画的设计等场所。

Applicaion:

- 1)Architectural decorative lighting.
- 2)Archway,canopy,bridge edge lighting
- 3)Amusement,park,theater.
- 4)Emergency hallway lighting.
- 5)Auditorium walkway lighting.
- 6)Stairway accent lighting.
- 7)Concealed lighting.
- 8)Backlighting for signage letters.
- 9)Channel letter lighting.
- 10)Cove lighting



图片 PICTURES	型号 PART NO	颜色 Emitting colour	长度(m) Lenght(m)	LED 颗粒 LED Qty.	LED 类型 LED type	功率(W) Watt(W)	输入电压 Voltage	Continuous connection(m) 连接长度 (m)
	LT-FLS5050R30-12	Red	2.5m	150pcs	SMD5050	36W	DC12V	2.5m
	LT-FLS5050G30-12	Green	2.5m	150pcs	SMD5050	36W		
	LT-FLS5050B30-12	Blue	2.5m	150pcs	SMD5050	36W		
	LT-FLS5050Y30-12	Yellow	2.5m	150pcs	SMD5050	36W		
	LT-FLS5050PW30-12	White	2.5m	150pcs	SMD5050	36W		
	LT-FLS5050WW30-12	Warm White	2.5m	150pcs	SMD5050	36W		
	LT-FLS5050RGB30-12	RGB	2.5m	150pcs	SMD5050	36W		

图片 PICTURES	型号 PART NO	颜色 Emitting colour	长度(m) Lenght(m)	LED 颗粒 LED Qty.	LED 类型 LED type	功率(W) Watt(W)	输入电压 Voltage	Continuous connection(m) 连接长度 (m)
	LT-FLS5050R30WP-12	Red	2.5m	150pcs	SMD5050	36W	DC12V	2.5m
	LT-FLS5050G30WP-12	Green	2.5m	150pcs	SMD5050	36W		
	LT-FLS5050B30WP-12	Blue	2.5m	150pcs	SMD5050	36W		
	LT-FLS5050Y30WP-12	Yellow	2.5m	150pcs	SMD5050	36W		
	LT-FLS5050PW30WP-12	White	2.5m	150pcs	SMD5050	36W		
	LT-FLS5050WW30WP-12	Warm White	2.5m	150pcs	SMD5050	36W		
	LT-FLS5050RGB30WP-12	RGB	2.5m	150pcs	SMD5050	36W		

图片 PICTURES	型号 PART NO	颜色 Emitting colour	长度(m) Lenght(m)	LED 颗粒 LED Qty.	LED 类型 LED type	功率(W) Watt(W)	输入电压 Voltage	Continuous connection(m) 连接长度 (m)
	LT-FLS5050R15-12	Red	5m	150pcs	SMD5050	36W	DC12V	5m
	LT-FLS5050G15-12	Green	5m	150pcs	SMD5050	36W		
	LT-FLS5050B15-12	Blue	5m	150pcs	SMD5050	36W		
	LT-FLS5050Y15-12	Yellow	5m	150pcs	SMD5050	36W		
	LT-FLS5050PW15-12	White	5m	150pcs	SMD5050	36W		
	LT-FLS5050WW15-12	Warm White	5m	150pcs	SMD5050	36W		
	LT-FLS5050RGB15-12	RGB	5m	150pcs	SMD5050	36W		

图片 PICTURES	型号 PART NO	颜色 Emitting colour	长度(m) Lenght(m)	LED 颗粒 LED Qty.	LED 类型 LED type	功率(W) Watt(W)	输入电压 Voltage	Continuous connection(m) 连接长度 (m)
	LT-FLS5050R15WP-12	Red	5m	150pcs	SMD5050	36W	DC12V	5m
	LT-FLS5050G15WP-12	Green	5m	150pcs	SMD5050	36W		
	LT-FLS5050B15WP-12	Blue	5m	150pcs	SMD5050	36W		
	LT-FLS5050Y15WP-12	Yellow	5m	150pcs	SMD5050	36W		
	LT-FLS5050PW15WP-12	White	5m	150pcs	SMD5050	36W		
	LT-FLS5050WW15WP-12	Warm White	5m	150pcs	SMD5050	36W		
	LT-FLS5050RGB15WP-12	RGB	5m	150pcs	SMD5050	36W		

图片 PICTURES	型号 PART NO	颜色 Emitting colour	长度(m) Lenght(m)	LED 颗粒 LED Qty.	LED 类型 LED type	功率(W) Watt(W)	输入电压 Voltage	Continuous connection(m) 连接长度 (m)
	LT-FLS3528R30-12	Red	5m	300pcs	SMD3528	24W	DC12V	5m
	LT-FLS3528G30-12	Green	5m	300pcs	SMD3528	24W		
	LT-FLS3528B30-12	Blue	5m	300pcs	SMD3528	24W		
	LT-FLS3528Y30-12	Yellow	5m	300pcs	SMD3528	24W		
	LT-FLS3528PW30-12	White	5m	300pcs	SMD3528	24W		
	LT-FLS3528WW30-12	Warm White	5m	300pcs	SMD3528	24W		


图片 PICTURES	型号 PART NO	颜色 Emitting colour	长度(m) Lenght(m)	LED 颗粒 LED Qty.	LED 类型 LED type	功率(W) Watt(W)	输入电压 Voltage	Continuous connection(m) 连接长度 (m)
	LT-FLS3528R30WP-12	Red	5m	300pcs	SMD3528	24W	DC12V	5m
	LT-FLS3528G30WP-12	Green	5m	300pcs	SMD3528	24W		
	LT-FLS3528B30WP-12	Blue	5m	300pcs	SMD3528	24W		
	LT-FLS3528Y30WP-12	Yellow	5m	300pcs	SMD3528	24W		
	LT-FLS3528PW30WP-12	White	5m	300pcs	SMD3528	24W		
	LT-FLS3528WW30WP-12	Warm White	5m	300pcs	SMD3528	24W		

图片 PICTURES	型号 PART NO	颜色 Emitting colour	长度(m) Lenght(m)	LED 颗粒 LED Qty.	LED 类型 LED type	功率(W) Watt(W)	输入电压 Voltage	Continuous connection(m) 连接长度 (m)
	LT-FLS3528R45-12	Red	5m	450pcs	SMD3528	36W	DC12V	5m
	LT-FLS3528G45-12	Green	5m	450pcs	SMD3528	36W		
	LT-FLS3528B45-12	Blue	5m	450pcs	SMD3528	36W		
	LT-FLS3528Y45-12	Yellow	5m	450pcs	SMD3528	36W		
	LT-FLS3528PW45-12	White	5m	450pcs	SMD3528	36W		
	LT-FLS3528WW45-12	Warm White	5m	450pcs	SMD3528	36W		

图片 PICTURES	型号 PART NO	颜色 Emitting colour	长度(m) Lenght(m)	LED 颗粒 LED Qty.	LED 类型 LED type	功率(W) Watt(W)	输入电压 Voltage	Continuous connection(m) 连接长度 (m)
	LT-FLS3528R45WP-12	Red	5m	450pcs	SMD3528	36W	DC12V	5m
	LT-FLS3528G45WP-12	Green	5m	450pcs	SMD3528	36W		
	LT-FLS3528B45WP-12	Blue	5m	450pcs	SMD3528	36W		
	LT-FLS3528Y45WP-12	Yellow	5m	450pcs	SMD3528	36W		
	LT-FLS3528PW45WP-12	White	5m	450pcs	SMD3528	36W		
	LT-FLS3528WW45WP-12	Warm White	5m	450pcs	SMD3528	36W		

LED MODULE SERIES

LED 模组

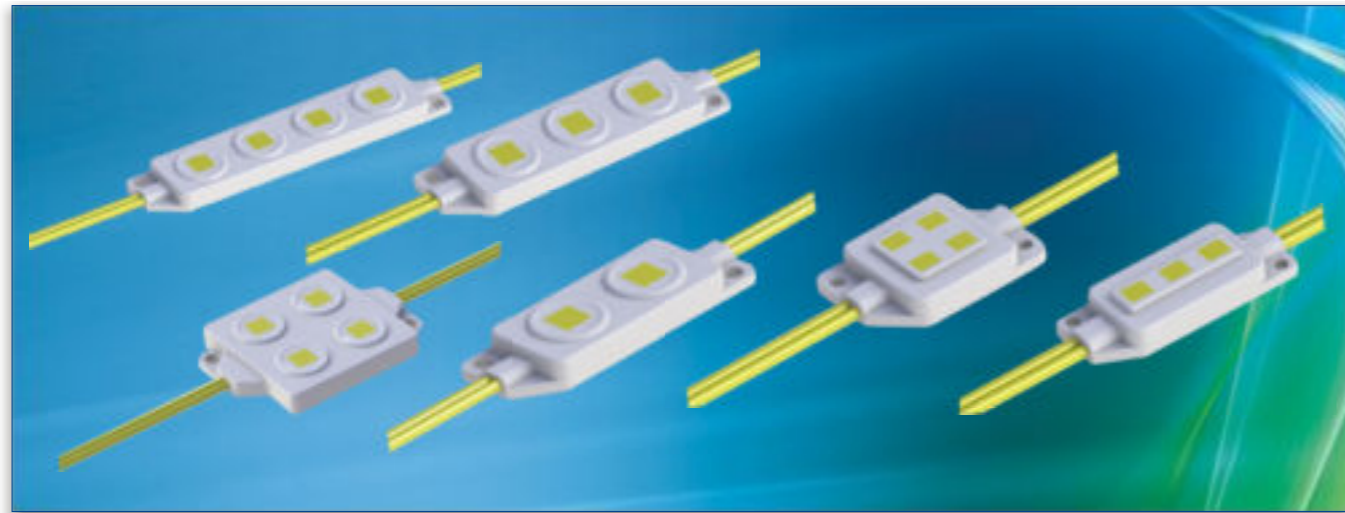

LED SMD Modules series adopt high quality high luminance LEDs, it's new green high-tech product, brilliant light, high in saturation, uniform in color, it's new revolution of light source in indoor and outdoor lighting/decoration fields;

Applications:

Features:

1. Long lifespan, energy saving, low cost;
2. Easy installation, groove and matching wires to enable easy fast installation;
3. Waterproof, use new waterproof design, working temperature -50°C ~ 80°C;
4. Energy Efficient: Energy saving up to 80% than traditional neon lights;

● LED贴片模组系列采用优质超高亮度LED为发光元件，是新一代绿色高科技产品，所发出的光色彩绚丽，饱和度，发光均匀，是室内外装饰等照明光源的新革命。

● 产品特点:

- 1、寿命长，省电、低成本。
- 2、安装快捷方便：发光模组配套连线及固定槽设计使用安装变得快速简易。
- 3、全防水设计：采用全新防水设计，工作环境应用范围-50°C ~ 80°C。
- 4、节能：与霓虹灯相比节省80%以上的电能。应用范围：广泛用于发光字光源、室内装饰照明、建筑物照明、灯箱字和标牌照明等。

型号/PART NO	颜色/Emitting colour	颗粒/QTY	功率/Watt (W)	光通量/Luminous flux (lm)	输入电压/Voltage
LT-MLS-4515S5050-WP-DW-2	DW/CW/WW/R/G/B/Y	2pcs	0.72W	14-16LM/pcs	DC12V
LT-MLS-6015S5050-WP-DW-3	DW/CW/WW/R/G/B/Y	3pcs	0.72W	14-16LM/pcs	
LT-MLS-7515S5050-WP-DW-4	DW/CW/WW/R/G/B/Y	4pcs	1.44W	14-16LM/pcs	
LT-MLS-4534S5050-WP-DW-4	DW/CW/WW/R/G/B/Y	4pcs	1.44W	14-16LM/pcs	
LT-MLS-3213S3528-WP-DW-3	DW/CW/WW/R/G/B/Y	3pcs	0.24W	4-5LM/pcs	
LT-MLS-2617S3528-WP-DW-4	DW/CW/WW/R/G/B/Y	4pcs	0.48W	4-5LM/pcs	

