



LED Aluminum Strip Light With Flat Cover

— LT-ALSCF/T 5050XXX-12

Recommend product



Benefits

- 1) Solid-state, high shock / vibration resistant
- 2) Major reduction in power costs
- 3) No RF interference, No buzzing noise
- 4) No flickering
- 5) No threat of high-voltage electrocution
- 6) Maintenance free, easy installation
- 7) Long lifetime
- 8) Low power consumption, high intensity

CE RoHS

Applications

1. Under-cabinet lighting
2. Refrigerated display lighting
3. Bar and freezer cabinet lighting



Basic Specification	Light Source	5050 SMD LED
	Color Temperature	Day light (6000K-7000K) Cool White (4000K-4500K) Warm White (3000K-3500K) RGB/R/G/B/Y
	LifeSpan	50,000Hours *
	Shell	Aluminium body/PMMA shell

Operating Environment	-4° F to 122F (-20° C to 50° C)
-----------------------	---------------------------------

Basic Specification	Input Voltage	DC12V
	LED drive mode	Constant Voltage



* T_c=25°C Note:LED's life may be affected by various factors

Specification table


Part No.	Emitting Colour	LED Qty.	Watt(w)	Length(cm)	Voltage(V)
LT-ALSCF5050AXX15-12	WW/CW/DW/R/G/B/Y/RGB	15pcs	3.6w \pm 10%	50cm	DC 12V
LT-ALSCF5050AXX30-12		30pcs	7.2w \pm 10%	100cm	
LT-ALSCF5050AXX45-12		45pcs	10.8w \pm 10%	150cm	

Part No.	Emitting Colour	LED Qty.	Watt(w)	Length(cm)	Voltage(V)
LT-ALSCF5050BXX30-12	WW/CW/DW/R/G/B/Y/RGB	30pcs	7.2w \pm 10%	50cm	DC 12V
LT-ALSCF5050BXX60-12		60pcs	14.4w \pm 10%	100cm	
LT-ALSCF5050BXX90-12		90pcs	21.6w \pm 10%	150cm	

Part No.	Emitting Colour	LED Qty.	Watt(w)	Length(cm)	Voltage(V)
LT-ALSCT5050AXX15-12	WW/CW/DW/R/G/B/Y/RGB	15pcs	3.6w \pm 10%	50cm	DC 12V
LT-ALSCT5050AXX30-12		30pcs	7.2w \pm 10%	100cm	
LT-ALSCT5050AXX45-12		45pcs	10.8w \pm 10%	150cm	


Part No.	Emitting Colour	LED Qty.	Watt(w)	Length(cm)	Voltage(V)
LT-ALSCT5050BXX30-12	WW/CW/DW/R/G/B/Y/RGB	30pcs	7.2w \pm 10%	50cm	DC 12V
LT-ALSCT5050BXX60-12		60pcs	14.4w \pm 10%	100cm	
LT-ALSCT5050BXX90-12		90pcs	21.6w \pm 10%	150cm	

Physical Dimension

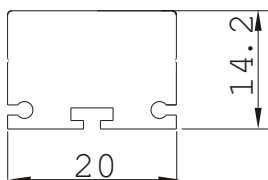

Installation Illustration

DC12V

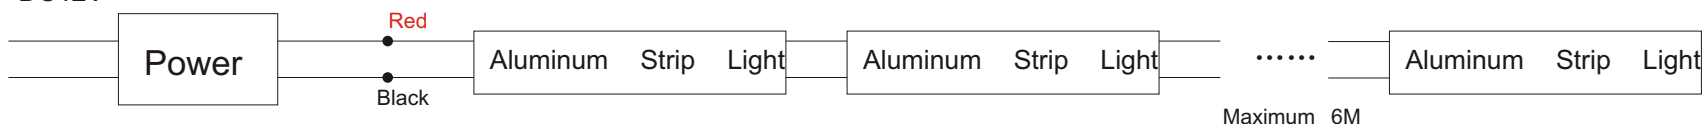


CE RoHS

Packing information


50CM

Individual	Net Weight	199g
Packing	Qty	20pcs/carton
	Net weight	3980g
	Gross weight	9680g
Outside	packing carton	61*19*12mm

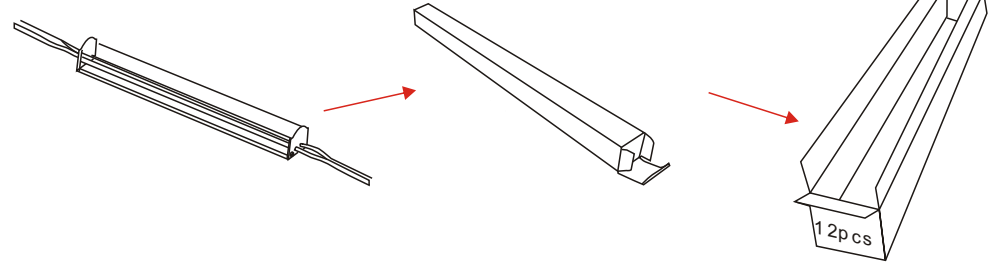

100CM

Individual	Net Weight	397g
Packing	Qty	20pcs/carton
	Net weight	7940g
	Gross weight	19340g
Outside	packing carton	111*19*12mm

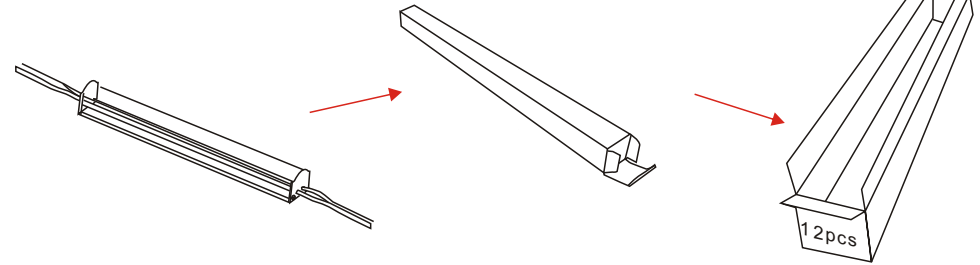

150CM

Individual	Net Weight	597g
Packing	Qty	20pcs/carton
	Net weight	11940g
	Gross weight	34740g
Outside	packing carton	161*19*12mm

