

LED Dimmable Bulb Series (球泡灯系列)

--LT-HPBD-7W



Feature:

With super bright LED light source. This LED bulb provides cozy and gentle light without flashing or UV radiation. It's small-sized, dimmable in 0-110VAC/0-220VAC, easy to install. With milk white glass cover, good light permeation.

LED 球泡灯特点:

LED球泡灯采用超高亮度的LED作为光源光色舒适, 可调光, 无紫外线辐射, 造型美观大方.

球泡灯灯罩采用防爆仿磨砂玻璃罩, 透光好, 颜色优美

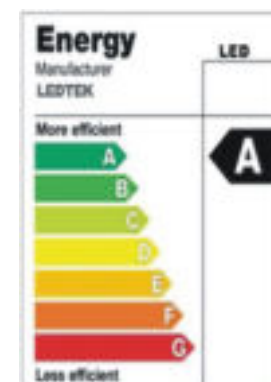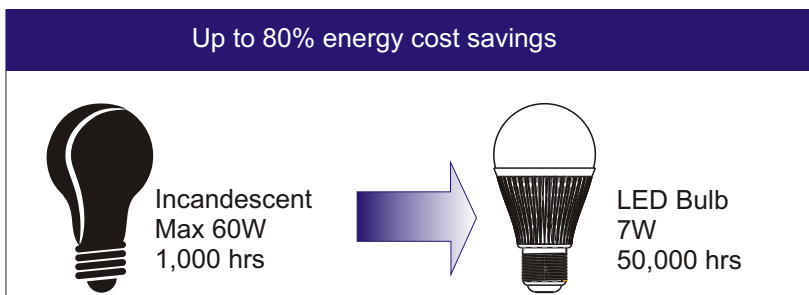

CE
RoHS

ShenZhen LEDTEK Optoelectronics Technology Co., Ltd
 ADD: 7th Floor, No. 2 building, 1 Liuxian Road, Block 67, Jia'an High Tech Industrial Park, Bao'an Shenzhen China 518102
 TEL: 0755-26785388 FAX: 0755-26788290
 E-mail: sales@ledtek.com.cn Http://www.ledtek.com.cn

● 深圳市镭泰光电科技有限公司
 地址: 深圳市宝安区79区留仙一路甲岸科技园2号7楼
 电话: 0755-26785388 传真: 0755-26788290
 邮箱: sales@ledtek.com.cn Http://www.ledtek.com.cn



Application :

These series of lamps are widely used in shop,hotel,family decoration and replace of traditional bulb.

Remark:

1. It is Non-waterproof.
2. Rating Voltage: 0-110VAC/0-220VAC are available.
3. Quantity of LED can design as per client requirement.

Basic Specification

Light Source	High-power LED
Color Temperature	Day light (6000K-7000K) Cool White (4000K-4500K) Warm White (3000K-3500K)
LifeSpan	* 50, 000Hours
Shell	Aluminium body/Glass Bulb

Operating Environment

Working Temperature	-20° C to 50° C
	Please make use of it in dry condition

Basic Electrical Specification

Input Voltage	110VAC/220VAC
LED drive mode	Constant Current Mode

Beam Angle Specification

View Angle	180 degree
------------	------------



CE RoHS

* Tj=25°

ShenZhen LEDTEK Optoelectronics Technology Co. , Ltd

ADD: 7th Floor, No. 2 building, 1 Liuxian Road, Block 67, Jia'an High Tech Industrial Park, Bao'an Shenzhen China 518102
TEL: 0755-26785388 FAX: 0755-26788290
E-mail: sales@ledtek.com.cn Http://www.ledtek.com.cn

● 深圳市镭泰光电科技有限公司


地址: 深圳市宝安区67区留仙一路甲岸科技园2号7楼
电话: 0755-26785388 传真: 0755-26788290
邮箱: sales@ledtek.com.cn Http://www.ledtek.com.cn




Specification table

Part No.	Color Temperature	Initial lighting	Size	Wattage	Base
LT-HPBD-7W	DayLight (6000k-7000k)	440lm	ø 68 × 133mm	7W ± 10%	E27/E26/B22
LT-HPBD-7W	CoolWhite(4000k-4500k)	425lm			
LT-HPBD-7W	WarmWhite(3000k-3500k)	410lm			


Physical Dimension

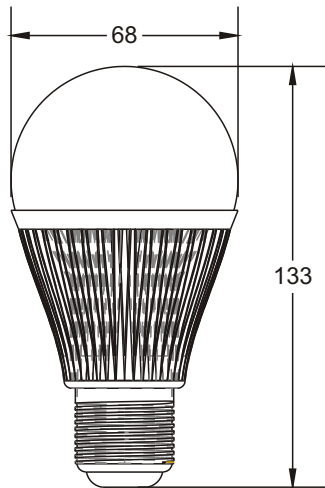

Optoelectronic

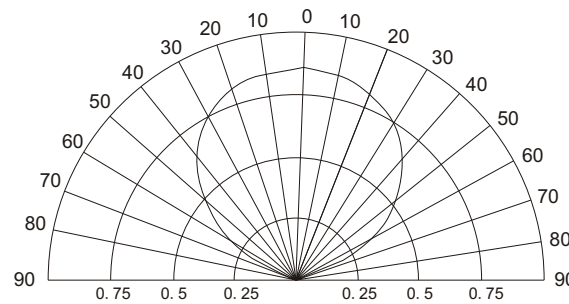


Candle Power Distribution Curve

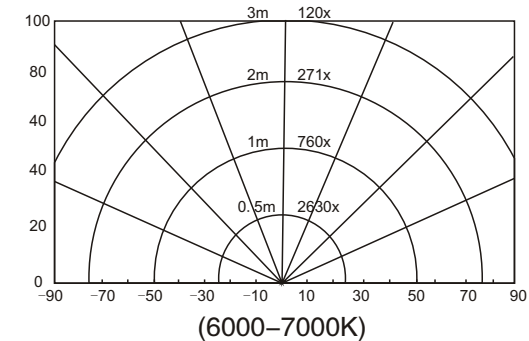

Illumination the centre
(6000-7000K)

Installation Illustration

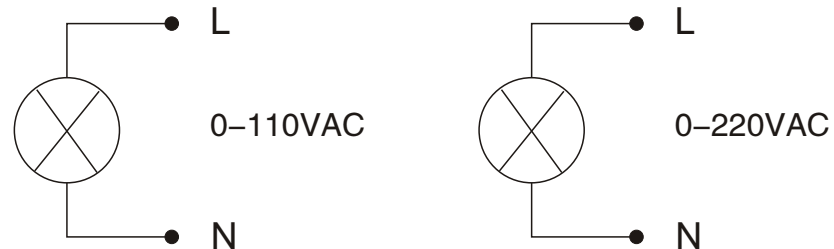

ShenZhen LEDTEK Optoelectronics Technology Co., Ltd

ADD: 7th Floor, No. 2 building, 1 Liuxian Road, Block 67, Jia'an High Tech Industrial Park, Bao'an Shenzhen China 518102
 TEL: 0755-26785388 FAX: 0755-26788290
 E-mail: sales@ledtek.com.cn Http://www.ledtek.com.cn


● 深圳市镭泰光电科技有限公司

地址: 深圳市宝安区67区留仙一路甲岸科技园2号7楼
 电话: 0755-26785388 传真: 0755-26788290
 邮箱: sales@ledtek.com.cn Http://www.ledtek.com.cn



Packing Specification

Individual Net Weigh	205g
Packing Qty	30pcs/box
Net weight	6.2Kgs
Gross weight	7Kgs
Outside packing carton	460*285*340mm

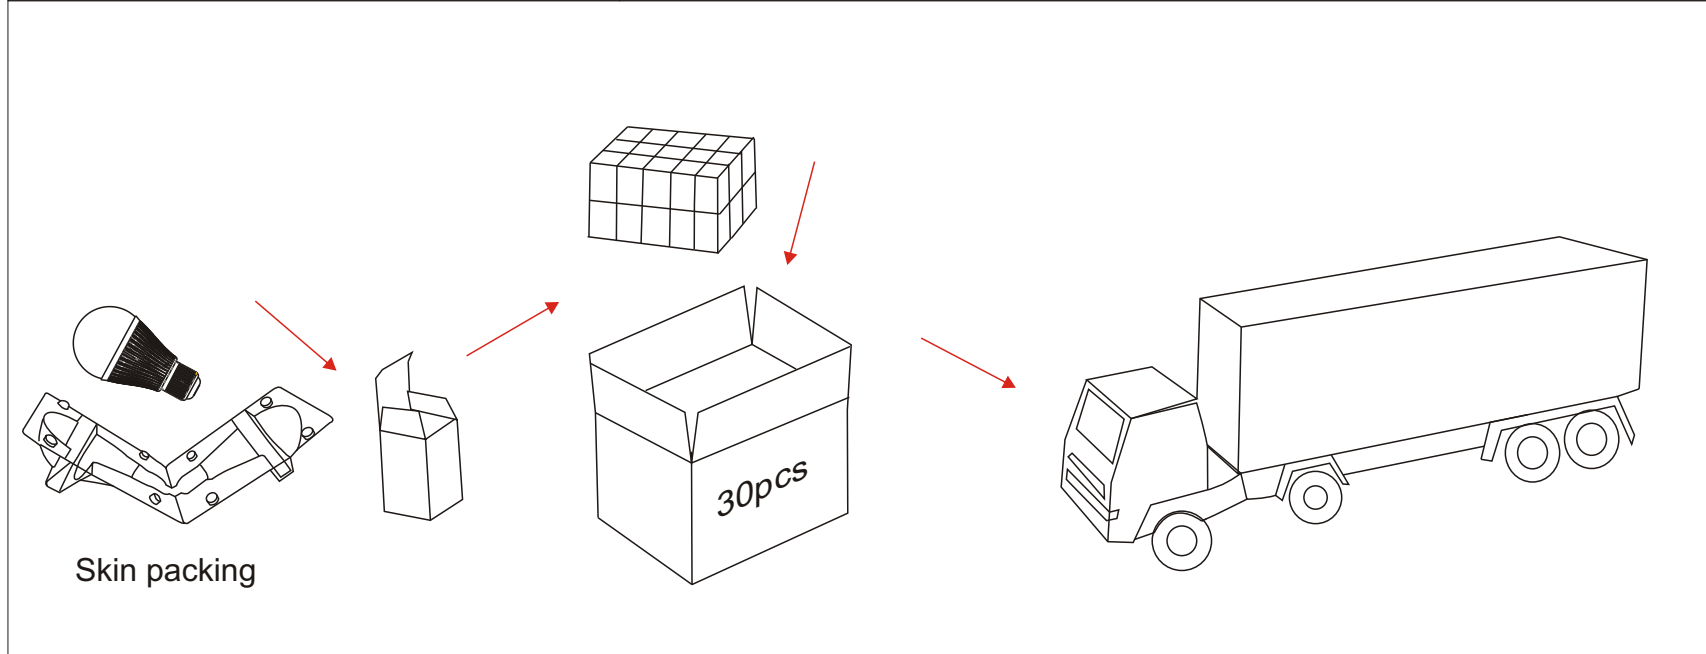

ShenZhen LEDTEK Optoelectronics Technology Co., Ltd

ADD: 7th Floor, No. 2 building, 1 Liuxian Road, Block 67, Jia'an High Tech Industrial Park, Bao'an Shenzhen China 518102
TEL: 0755-26785388 FAX: 0755-26788290
E-mail: sales@ledtek.com.cn Http://www.ledtek.com.cn

● 深圳市镭泰光电科技有限公司

地址: 深圳市宝安区67区留仙一路甲岸科技园2号7楼
电话: 0755-26785388 传真: 0755-26788290
邮箱: sales@ledtek.com.cn Http://www.ledtek.com.cn

